



Standard Medium Interfacing

HTL# HN126



Properties: Lightweight fusible non-woven interfacing made from synthetic fibres. Also available in white.

Application: For the fusing of small parts of clothing, handicrafts and needlework. Suitable for lightweight fabrics for garments.

Advantages:


- Easy to iron-on
- Wash up to 60°C

Technical Data

Specification:

Width	90cm
Length	25m / roll
Packing	12rolls / ctn
Gram	38g/m2
Material	100% Polyester
Colour	Black

Properties::

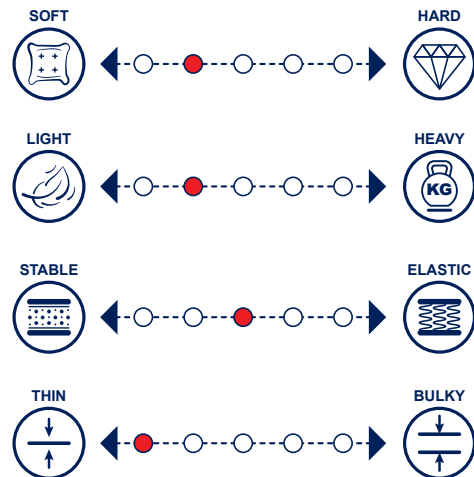

Instructions

1. As a non-woven interfacing, you can place pattern pieces in any direction.
 2. Cut out the pattern pieces required. Trim interfacing down all round by 3mm (1/8").
 3. Place the interfacing on the reverse side of the fabric with the coated side facing down, cover with a damp cloth, place iron on cloth for approx 12 seconds. Do not push the iron. Raise and lower to fuse all areas.
 4. After fixing, lay the pieces down flat to cool down for around 30 minutes to allow the bond to stabilise.
- N.B. Always test the product on a scrap of your project's fabric following steps 2-4 above.

Wash & Care Instructions



12 seconds