



Standard Heavy Firm Interfacing

HTL# HN127



Properties: Heavyweight, stable fusible non-woven interfacing made from a blend of synthetic fibres. Fully coated surface for firmer handle. Also available in white.

Application: For the fusing of shaped waistbands and belts, cuffs and collars and for various handicrafts. Suitable for medium- to heavyweight fabrics for garments.

Advantages:


- Easy to work with
- Retains its shape
- Wash up to 40°C

Technical Data

Specification:

Width	90cm
Length	25m / roll
Packing	6rolls / ctn
Gram	65g/m2
Material	30% Viscose, 70% Polyester
Colour	Black

Properties::

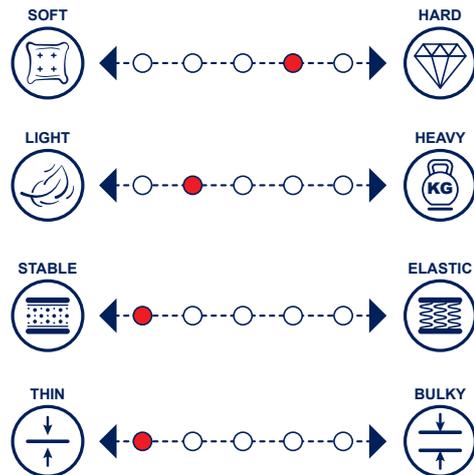

Instructions

1. As a non-woven interfacing, you can place pattern pieces in any direction.
 2. Cut out the pattern pieces required. Trim interfacing down all round by 3mm (1/8").
 3. Place the interfacing on the reverse side of the fabric with the coated side facing down, cover with a damp cloth, place iron on cloth for approx 12-15 seconds. Do not push the iron. Raise and lower to fuse all areas.
 4. After fixing, lay the pieces down flat to cool down for around 30 minutes to allow the bond to stabilise.
- N.B. Always test the product on a scrap of your project's fabric following steps 2-4 above.

Wash & Care Instructions



12-15 seconds